



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Rec'd PCT/PTO

PCT/EP 04/50001
JUL 2005

10/542485

RECEIVED

16 JAN 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03100098.7 ✓

18/04 / 50001

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:

Application no.: 03100098.7 ✓

Demande no:

Anmeldetag:

Date of filing: 20.01.03 ✓

Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.

Groenewoudseweg 1

5621 BA Eindhoven

PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:

(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.

Si aucun titre n'est indiqué se référer à la description.)

Shaving apparatus

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

B26B19/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL PT SE SI SK

Shaving apparatus

This invention relates to a shaving apparatus comprising:
a plurality of shaving heads, each comprising a circular shear plate provided
with hair-entry apertures;

5 a rotatable cutting member associated with and rotatable relative to the shear
plate,

a motor, and

a drive structure coupling said motor to said cutting members for driving
rotation of the cutting members, said drive structure comprising a plurality of drive units,
each of said drive units extending at least from a drive rim engaged for driving the drive unit
10 to a coupling end coupled to one of said cutting members for transferring rotation of the drive
unit to the cutting member,

wherein at least the drive rims of the drive units are each suspended for rotation about an axis
of rotation.

15

Such a shaving apparatus is known from U.S. Pat. No. 4,257,161. According
to this document, a shaving apparatus has a floating shaving head comprising a shear plate
with hair-entry apertures, a cutting member, which is rotatable relative to the shear plate, and
- ~~the~~ rotatable coupling spindle which is rotationally coupled at one end to the cutting
20 member and at the other end to a drive mechanism. At at least one end of the coupling
spindle, the coupling is a three-point coupling. In one embodiment, the cutting member has
three coupling openings which are distributed around the rotational axis of the cutting
member and the coupling spindle is provided with three axially extending coupling members,
which respectively engage in the coupling openings.

25 The coupling spindle may be provided with a flange, which is housed in a
cavity in a hub of a gear wheel of the drive mechanism. The flange is movable in the cavity
to permit tilting and axially displacing the coupling spindle, and three ribs may be formed on
the cavity for respective engagement in three recesses in the periphery of the
flange to form a three-point coupling at the other end of the coupling spindle. The ribs are

distributed about and extend parallel to the rotational axis of the gear wheel, and the recesses are correspondingly distributed about the rotational axis of the coupling spindle. Such apparatus allows the axes of rotation of the (usually toothed) drive rims to be offset and preferably closer together than the axes of rotation of the cutting members so that a compact transmission is obtained. One reason why a compact transmission is advantageous is that it allows the housing to taper from a relatively large shear plate holder to the motor that has a cross-section that is substantially smaller than the surface of the shear-plate holder. However, the coupling spindles that are tiltable relative to the drive rims are oriented at a relatively large angle to each other, to the drive rims and to the shaving heads. This entails that a specific design of the couplings is required to prevent limiting the freedom of tilting of the shaving heads, that relatively much friction and wear occurs at the couplings and where the spindles are coupled to the drive rims, even if the difference between the spacing between the axes of rotation of the drive rims and the spacing between the axis of rotation of the cutting members is relatively small. A further consequence is that, on pivoting or mounting the shear-plate holder into its operating position, the coupling ends of the coupling spindles are out of line with the coupling openings of the cutting members and need to be urged into alignment with the coupling openings against a spring force before engagement with the coupling openings of the cutting members.

From U.S. Pat. No. 3,890,705, an apparatus is known that has a coupling pin at the end of the coupling spindle, which engages with a coupling slot in the cutting member with a large amount of play. This allows the cutting member to move back and forth relative to the coupling spindle in the longitudinal direction of the slot, which may cause wear and annoying noise.

It is an object of the invention, to provide a solution that allows the distance between the centers of the drive rims of the drive units coupled to each of the cutting members to be substantially smaller than the distance between the centers of the cutting members, while at least reducing friction, wear, noise and tilt obstruction normally associated to prior art apparatuses having tiltable spindles to overcome the offset between, on the one hand, the distances between the centers of the drive rims and, on the other hand, the distances between the centers of the cutting members.

According to the present invention, this object is achieved by providing an apparatus according to claim 1. The mutually diverging orientations of the axes of rotation of

the drive rims allows the centers of the cutting members to be spaced apart further than the centers of the drive rims, without requiring the rotatable spindle of each drive unit to extend at an angle relative to the drive rim coupled thereto.

Particular embodiments of the invention are set forth in the dependent claims.

5 Further aspects, effects and details of the invention are described with reference to an example shown in the accompanying drawings.

10 Fig. 1 is a to some extent schematized front elevation of a shaving apparatus according to an embodiment of the invention having three floating heads,

Fig. 2 is a to some extent schematized side elevation of the shaving apparatus of Fig. 1 with one of the shaving heads shown in cross-section taken on the line II-II in Fig.1,

Fig. 3 is a cut away perspective view of the motor and the drive structure of the apparatus according to Figs. 1 and 2,

15 Fig. 4 shows a schematized longitudinal section taken along the axes of rotation of a central gear wheel and the drive rim of one of the drive units, and

Fig. 5 is a to some extent schematized side elevation of a shaving apparatus according to another embodiment of the invention with two of the shaving heads shown in cross-section along respective center lines.

20

The shaving apparatus shown in Figs. 1 and 2 comprises a housing 1 on which is mounted a shear-plate holder 2 for three shear plates 3. The shear plates 3 have hair entry ~~apertures~~ 4. A rotary cutting member 5 is situated on the inner side of each shear plate 3, for cooperation therewith in known manner.

25 The cutting members are rotated relative to the respective shear plates by a drive structure including an electric motor 10 and a drive structure, to which the cutting members 5 are each coupled. The cutting members 5 are each coupled to an associated ~~coupling~~ spindle 6. In turn, the spindles are each coupled to a drive rim 7. According to the present example, the drive rim is a toothed rim engaged by a gear wheel, but in principle the drive rim may also be designed to be engaged in other manners, such as by friction, by a pulley, by a belt or by a drive chain. A central gear wheel 8 is journaled centrally between ~~the toothed rims~~ 7 and an upper, outwardly facing gear engages each of the toothed rims. A ~~pinion~~ wheel 15 fixed on the motor shaft 16 engages an inwardly facing gear of the gear

30

wheel 8. The toothed rims 7 and an associated shaft 11 are each rotatably journalled in a mounting plate 12.

To each shaft 11, a hub 13 is connected of which click fingers 22 extend into an associated one of the spindles 6 and engage an inwardly facing rim 17 to keep the hubs 13 and the associated spindles 6 together when the shear plate holder 2 is dismounted. Inside a cavity 14 formed by axial bores in the spindle 6 and in the hub 13, a compression coil spring 23 is mounted, which presses the coupling end 27 of the spindle 6 into engagement with the cutting member 5 or at least with a coupling member for driving the cutting member. The coil spring 23 exerts a force on the spindle 6 in the direction of the associated cutting member 5. This force is transmitted to the cutting member 5 by the coupling spindle 6 and via the cutting member 5 to the associated shear plate 3; the flanged edge 19 of which is thereby pressed against the shear plate holder 2. In use, the shear plates 3, together with the associated cutting members 5 and coupling spindles 6, can be pressed inwards against the action of the springs 23 under the pressure of which the shear plates are held against the user's skin.

All three cutting members 5, are coupled to the drive motor 10 in the above manner, the three toothed rims 7 nesting with the single centrally disposed gear wheel 8.

Ribs or grooves may be are formed on the wall of the cavity in each spindle and co-operate with ribs or grooves on the hub 13. Thus, a multi-point coupling (preferably having three or more point, line and/or surface contacts) is obtained between the hub 13 and the spindle 6 to transmit the rotary movement of the toothed rim 7 to the coupling end 27 of the spindle 6. The spindle 6 may be tilted relative to the toothed rim to accommodate to the position of the center of the cutting member 5 relative to the axis of rotation 20 of the toothed rim 7, for instance to assume a position that is slightly angled relative to the axis of rotation 20 of the toothed rim 7.

The coupling end 27 of each coupling spindle 6 remote from the hub 13 is formed triangularly and bears against wall of a correspondingly shaped recess 21 in the cutting member 5. The spindle 6 is thus also coupled to the cutting member 5 by a multi-point coupling, which will permit tilting movement of the coupling spindle and the cutting member relative to each other.

The axes of rotation 20 of the drive rims 7 are oriented at angles relative to each other and diverge from each other in a direction from the drive rim 7 to the coupling end 27. This allows the centers of the toothed rims 7 to be closer together than the centers of the cutting members 5 and hence a more compact and lightweight construction with smaller

drive wheels, without entailing the disadvantage of a relatively large angle between the spindle 6 and the cutting member 5 or the disadvantage of a substantial angle between the spindle 6 and the hub 13. This, in turn, reduces friction and wear in the drive structure. The relatively small angle between the spindle 6 (or more generally, the drive unit) and the center line of the shaving head in its neutral position provides the advantage that the maximum angle between the cutting member 5 and the spindle 6 that can occur when the floating shaving head is tilted over a given angle from its neutral position, by pressing it inwards on one side, is reduced. Accordingly, the smallest maximum angle of tilting movement of the shaving heads from their neutral positions is increased.

That the shaving heads can be tilted over a wider angle is especially useful for shaving apparatuses of which the shear-plate holder consists of a number of elements, such as floes or panels, that are tiltable with respect to each other.

Fig. 5 shows an apparatus of which the axes of rotation of the drive rims for the different shaving heads are oriented at different angles relative to each other.

The mutually angled configuration of the axes of rotation of the drive rims can be applied with particular advantage to apparatuses comprising more than three shear-plates, resulting in a relatively large shear-plate holder, which may be flat or contain portions that extend at substantial angles relative to each other.

The angle between the axes of rotation of the toothed rims is preferably at least 3° . In particular if a generally convex design of the shear-plate holder is desired, the angle between the axes can be quite large, for instance up to 20 or 45° . The preferred angle for a shaver with an average, customay shear plate holder is about 8 to 10° .

To uniformly drive the cutting members 5 of all shaving heads, the axis of rotation of the central gear wheel 8 preferably extends centrally between the axes of rotation of the toothed rims 7 of the drive units 9 and at the same angle to each of the axes of rotation of the toothed rims 7.

CLAIMS:

1. A shaving apparatus comprising:
a plurality of shaving heads, each comprising a circular shear (3) plate
provided with hair-entry apertures (4); a rotatable cutting member (5) associated with and
rotatable relative to the shear plate (3),

5 a motor (10), and
a drive structure coupling said motor (10) to said cutting members (5) for
driving rotation of the cutting members (5), said drive structure comprising a plurality of
drive units (9), each of said drive units extending at least from a drive rim (7) engaged for
driving the drive unit to a coupling end (27) coupled to one of said cutting members (5) for
10 transferring rotation of the drive unit (9) to the cutting member (5),

wherein at least the drive rims (7) of the drive units (9) are each suspended for rotation about
an axis of rotation (20),

characterized in that, the axes of rotation (20) of said drive rims (7) are oriented at angles
relative to each other and diverge from each other in a direction from the drive rim (7) to the
15 coupling end (27).

2. An apparatus according to claim 1, in which the angle between said axes of
rotation of said drive rims is at least 3°.

20 3. An apparatus according to claim 1 or 2, further comprising a central gear
wheel (8) engaging said drive rims (7), said central gear wheel being rotatable about an axis
of rotation extending between the axes of rotation of said drive rims (7) of said drive units
(9).

25 4. An apparatus according to any one of the preceding claims, further comprising
a shear-plate holder (2) including a number of elements each holding at least one shear-plate,
which elements are tiltable with respect to each other.

5. An apparatus according to any one of the preceding claims, further comprising a shear-plate holder (2) including a number of elements each holding at least one shear-plate, which elements extend at angles with respect to each other.

5 6. An apparatus according to any one of the preceding claims, in which at least two of said angles between axes of rotation (20) of said drive rims (7) are different from each other.

7. An apparatus according to any one of the preceding claims, in which the
10 number of shaving heads is larger than three.

ABSTRACT:

A shaving apparatus has a plurality of shaving heads, each with a rotatable cutting member (5) associated with and rotatable relative to a shear plate (3). For driving the cutting members (5), a plurality of drive units (9) is provided, each of said drive units extending at least from a drive rim (7) engaged for driving the drive unit to a coupling end (27) coupled to one of the cutting members (5) for transferring rotation of the drive unit (9) to the cutting member (5). The drive rims (7) of the drive units (9) are suspended for rotation about axes of rotation (20) that are oriented at angles relative to each other and diverge from each other in a direction from the drive rim (7) to the coupling (27).

10 Fig. 4

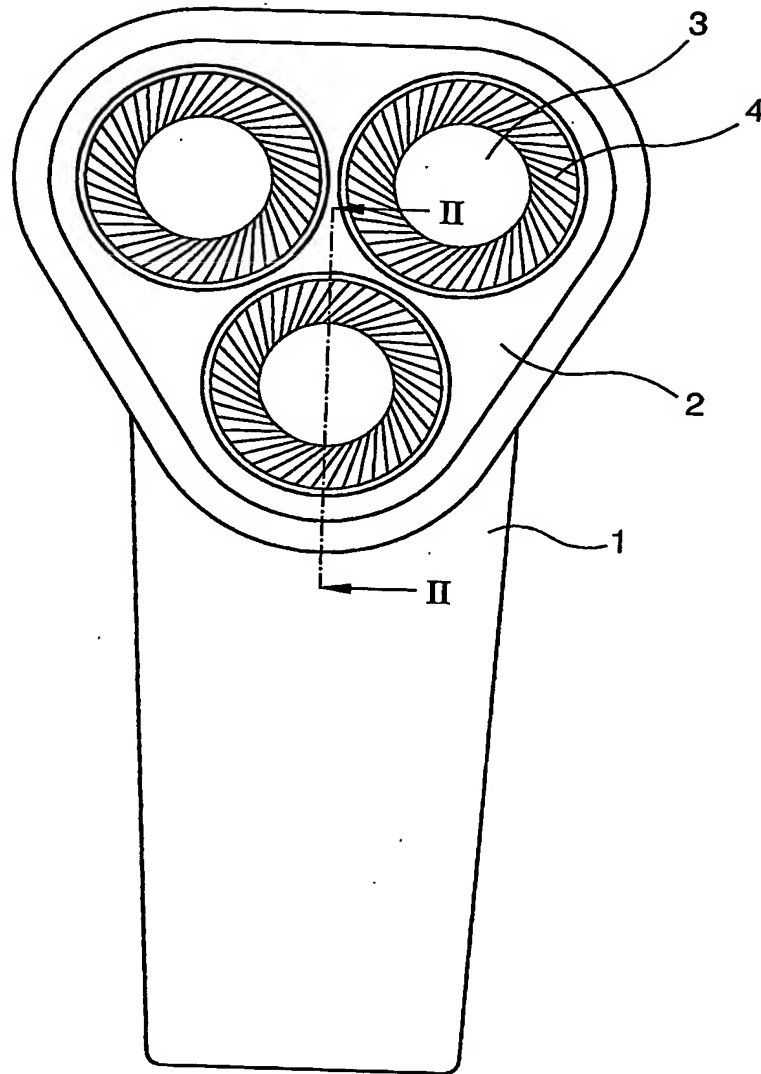


Fig. 1

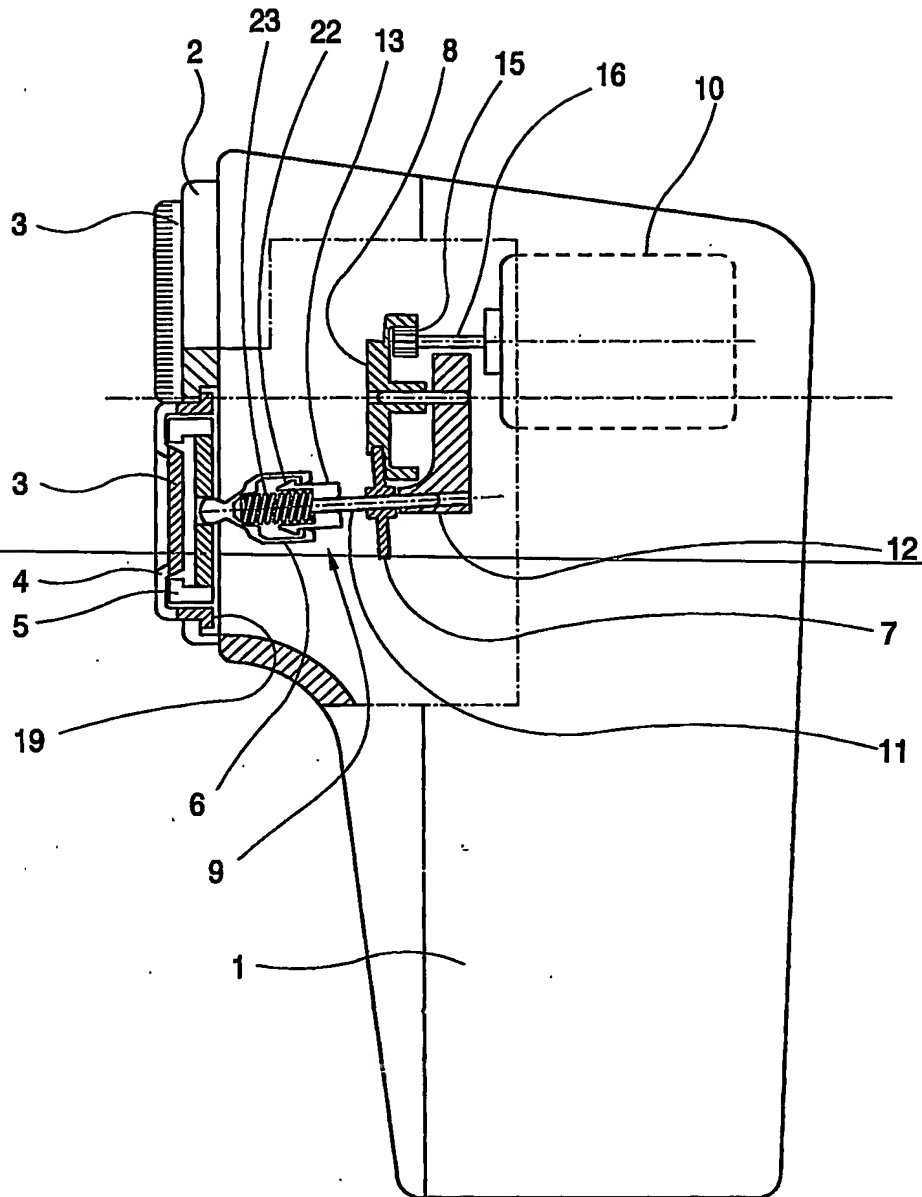


Fig. 2


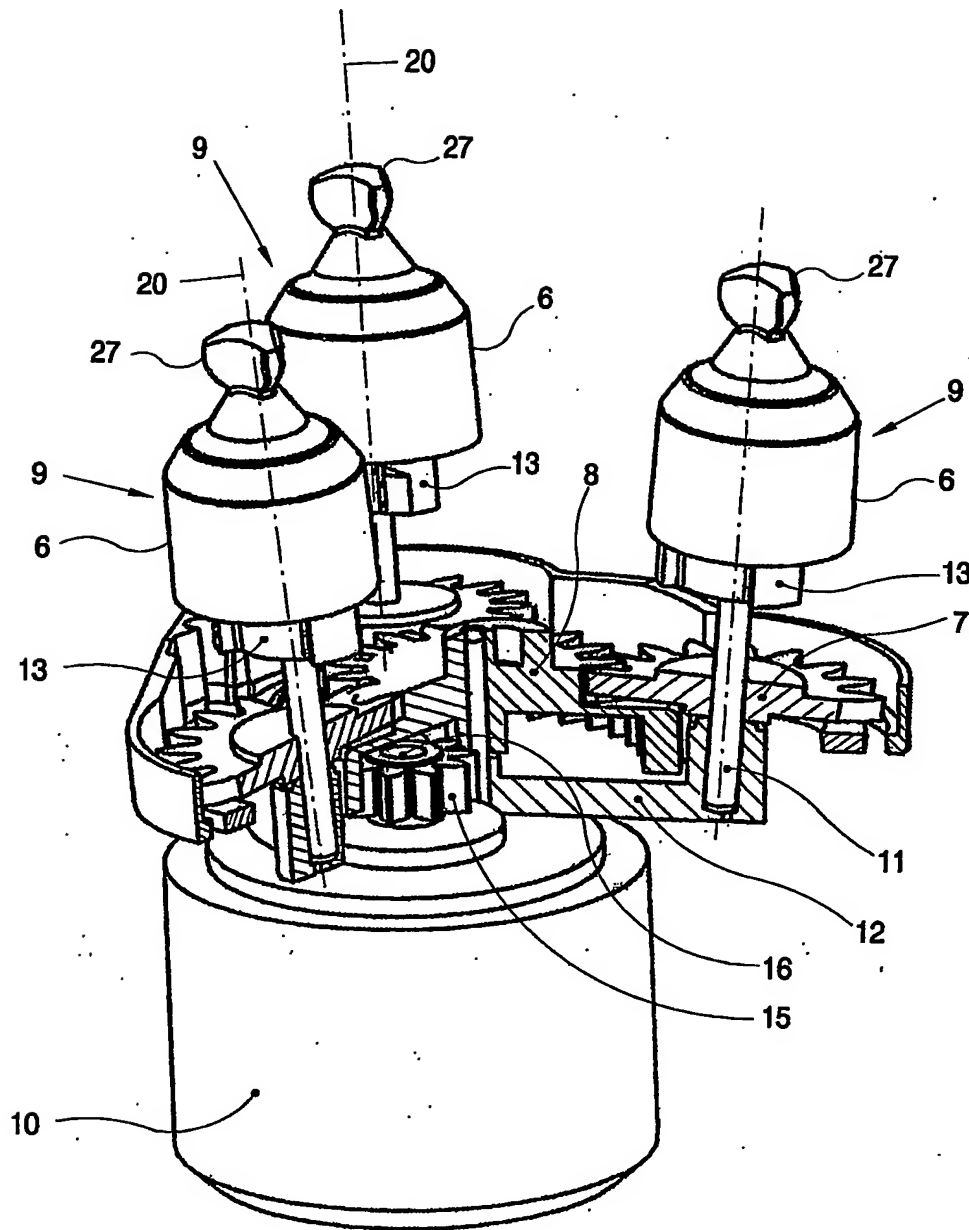


FIG. 3

PCT Application
PCT/IB2004/050001

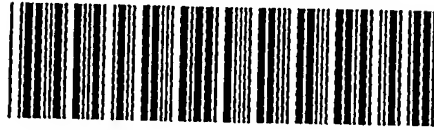

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.